

1

Ceiling/Soffitto

2

Wall/Parete

3

4

5

6

Wall with brackets
Parete con squadrette

7

8

9

MAX.12,9

MIN.8,2

10

NO

Max Ø8,00 mm

OK

11

12

TO KEEP IF USED ON TRACKS
WITH GUIDING SLOT

DA UTILIZZARE CON I BINARI CON CAVA

TO KEEP CUT IF USED ON TRACKS
WITHOUT GUIDING SLOT

TAGLIARE CON I BINARI SENZA CAVA

13

14

16

17

15

18

19

⚠ CORRECT POSITIONING

12 Nm



Vetro 24

WITH FLUID[®]
TECHNOLOGY

MOD. SYSTEM VETRO 24 7002.06973 REV. 01

Sliding system for glass with clamp height 24mm.












Scorrevoli per porte in vetro con pinza alta 24mm.



Growth is based on respect, protection is a duty. / La crescita si basa sul rispetto, proteggere è un dovere.

Raccolta differenziata carta / Paper separate collection



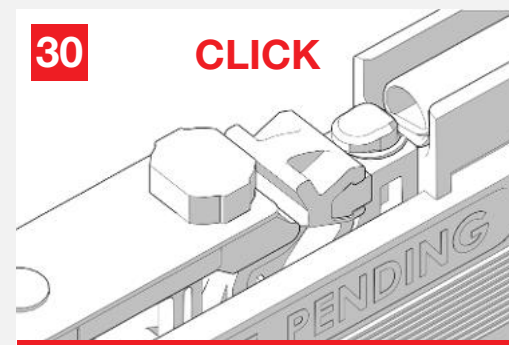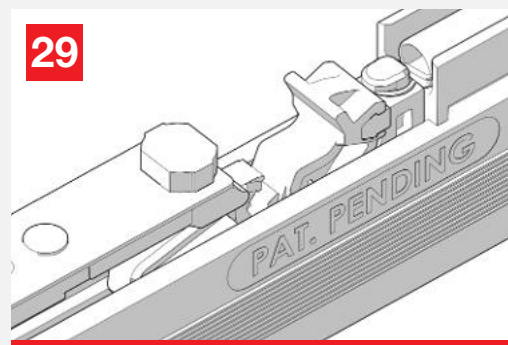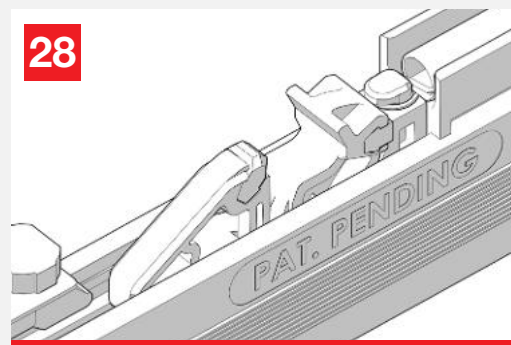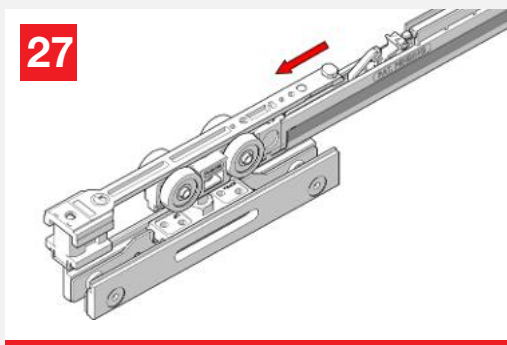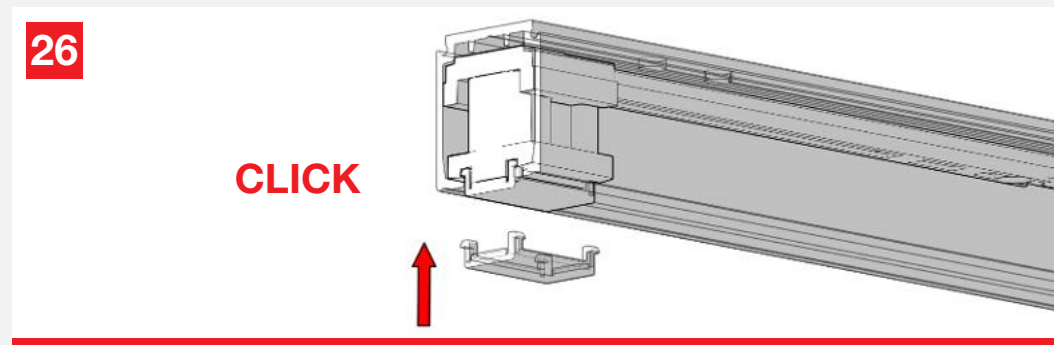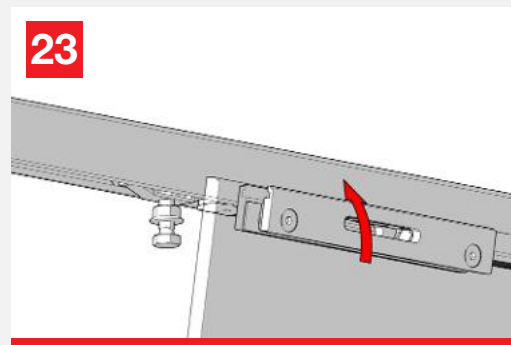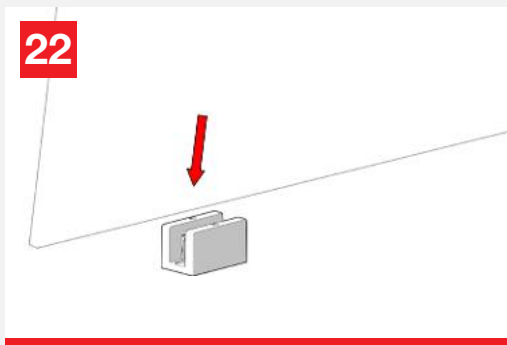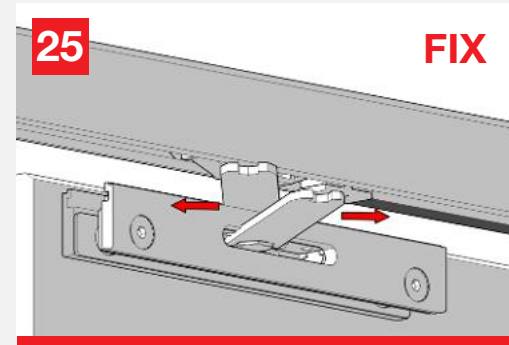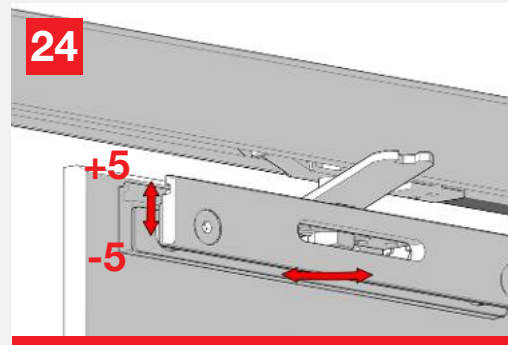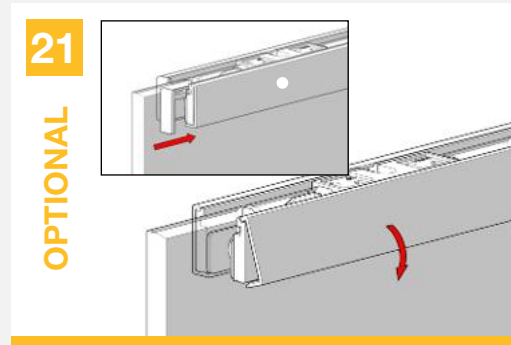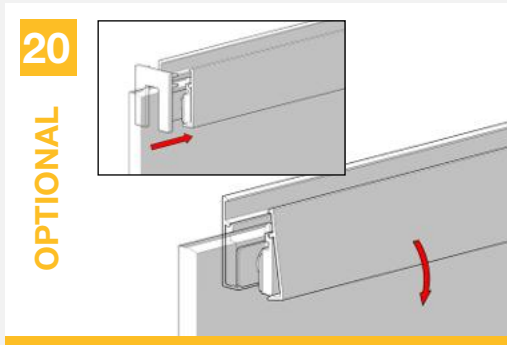

CLOSE THE DOOR SLOWLY AT FIRST AUTOMATIC LOAD AFTER INSTALLATION
CHIUDERE LA PORTA LENTAMENTE AL PRIMO CARICAMENTO AUTOMATICO DOPO L'INSTALLAZIONE

